

VELVET Power 2x2 Spot 15° Studio IP51



Ref.: VP2X2SPST

Datasheet: June 2021 / Page 1

Bicolor dustproof AC powered concentrated long distance beam light LED panels

[Click here for more product information](#)

VP2X2SPST includes: 1x VELVET Power 2x2 Spot 15° LED dustproof panel IP51 with DMX XLR5 In & Out, 1x yoke with 28mm junior pin, 1x 3,5mts power cable with aerial PowerCon TRUE1



1. Power switch
2. XLR-3 DC In
3. XLR-5 DMX In
4. +/- Adjustment buttons
5. 3200K/ 5600K Quick access button
6. Mode selection butto (Dimmer/ Colour Temp)
7. Digital display
8. XLR-5 DMX Out



VELVET Power 2x2 Spot 15° Studio IP51




Ref.: VP2X2SPST

Datasheet: June 2021 / Page 2

COLOUR TEMPERATURE	adjustable from 2700K to 6500K in 100K steps
LIGHT INTENSITY	dimnable 0 to 100, smooth and flicker-free
TLCI	98 at 3200K and 97 at 5600K
DIMENSIONS	690x620x68mm / 27"x24.5"x2.7" panel 770x750x125mm / 30"x29.5"x5" panel + yoke + PSU
WEIGHT	14 kg / 31 lbs panel 16 kg / 35.3 lbs panel + yoke 20 kg / 44 lbs panel + yoke + PSU
POWER DRAW	340W (12.1 Amps at 28 VDC – 0.7 Amps at 230VAC)
POWER SUPPLY	90-264V AC 50/60Hz
PHOTOMETRICS	23000 lux / 2137 fc at 3m / 10 feet 7000 lux / 650 fc at 6m / 20 feet 2000 lux / 186 fc at 12m / 40 feet
BEAM ANGLE	15° nominal with filter D25 30° D50 45° D100 90° DVELVET 105°
LED RATED LIFE	more than 50,000 hours
OUTPUT FREQUENCY	16KHz flicker-free up to 2000fps
COOLING	no-noise, fan-free passive cooling
PROTECTION	IP51 dustproof, indoor or outdoor use
CONSTRUCTION & FINISH	Made of black powdercoated extruded and sheet aluminum
VELVET LED TECHNOLOGY	selected BIN high-power LED + VELVET custom optics + CPU software control
ACCESSORIES	AC power supply, foldable 20°, 40° or 60° Snapgrids, foldable Snapbag softbox, spacelight cylinder, removable barn doors, remote control, hard case
RIGGING OPTIONS	aluminum yoke with 28mm junior pin, multiple ¼-20" rigging points, multipanels yokes, pole operated yoke

WIRE VIEW

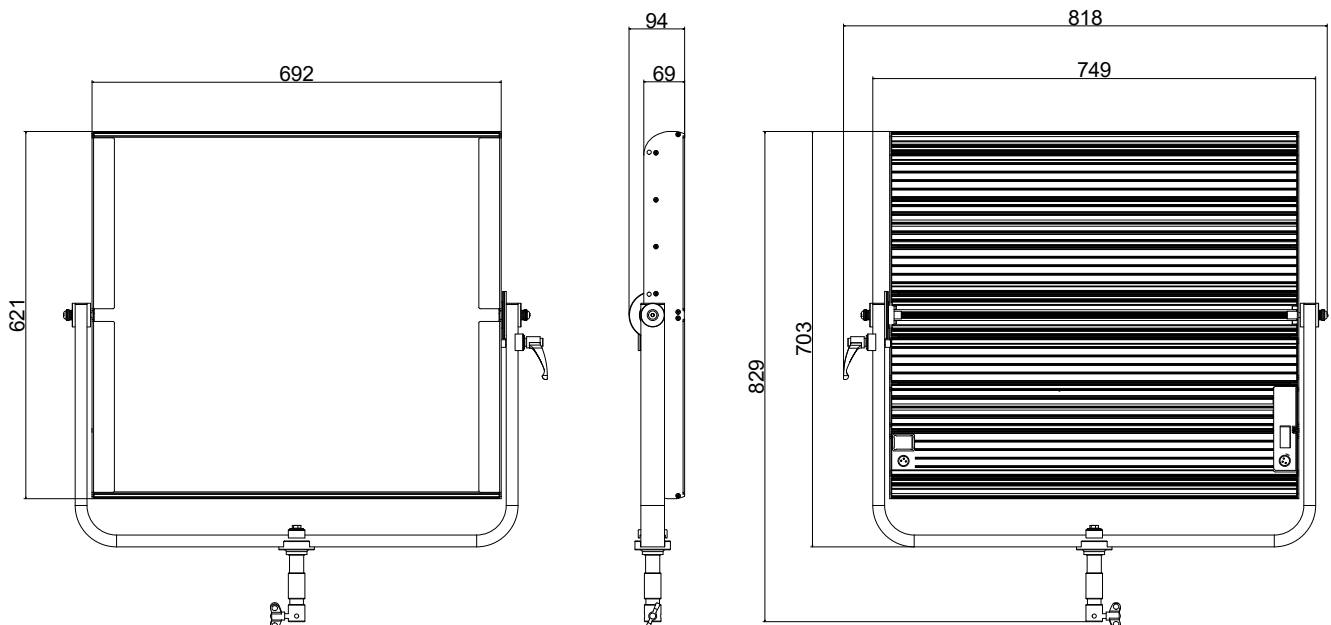




VELVET Power 2x2 Spot 15° Studio IP51




Ref.: VP2X2SPST

Datasheet: June 2021 / Page 3

PHOTOMETRICS

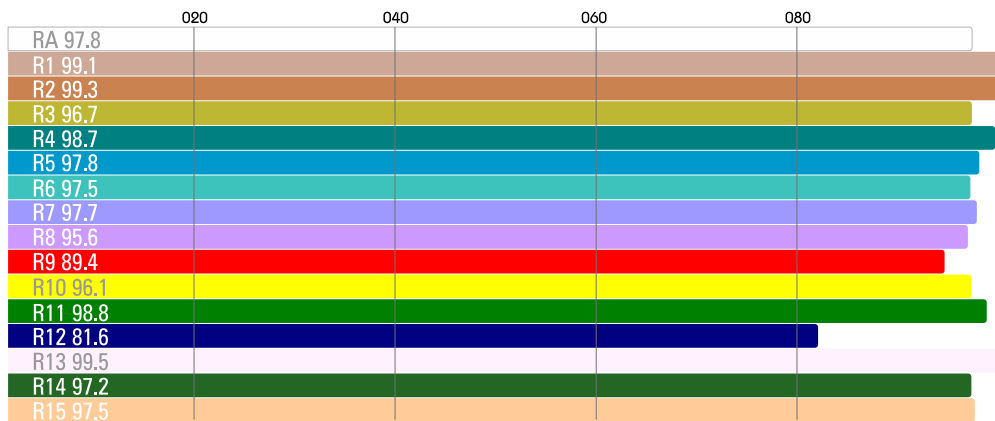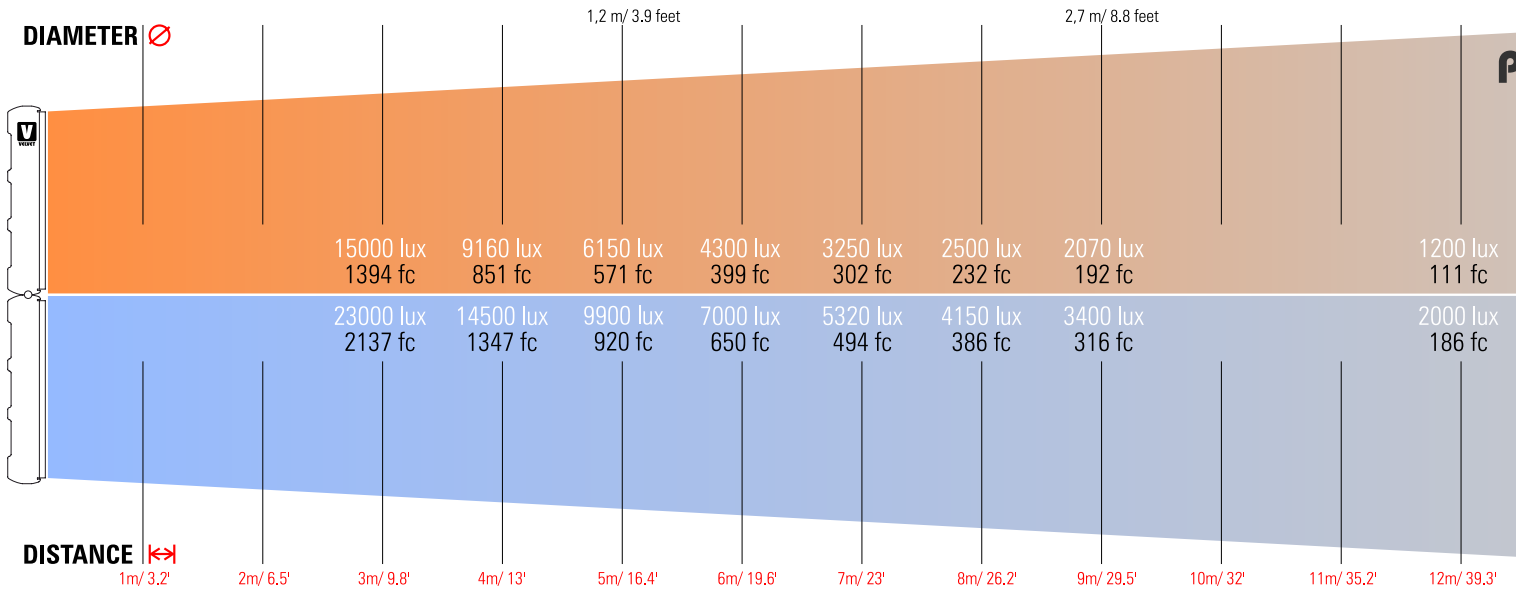

CCT 3220K

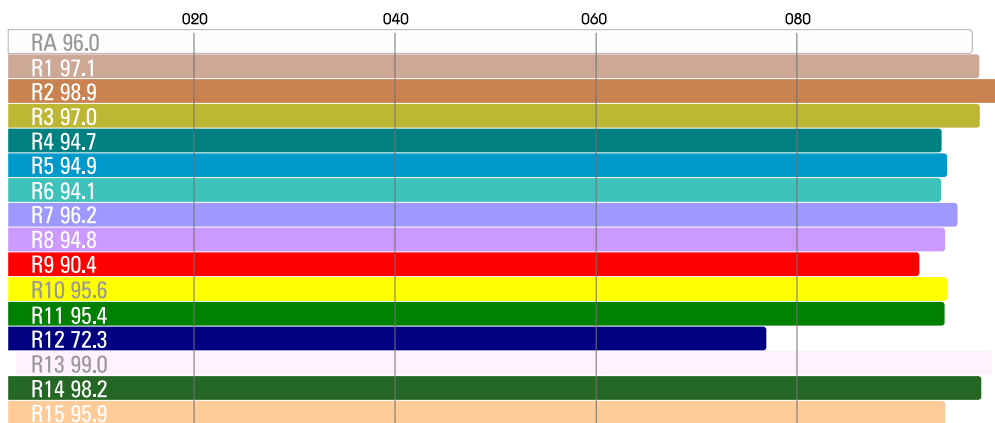

CCT 5440K

VELVET Power 2x2 Spot 15° Studio IP51



Ref.: VP2X2SPST

Datasheet: June 2021 / Page 4

ACCESSORIES

POWER SUPPLY



VP2X2IP54-PSU

RIGGING



VL2X2-YPO

BEAM CONTROL



VL2x2-RB



VL2x2-SG



VL2x2-SG20



VL2X2-SB



VL2X2-SGXSB




VL2X2-SPACEKIT




VL2x2-H



VL2x2-SLOTKIT



VP2x2-D25



VP2x2-D50



VP2x2-D100



VP2x2-DVL



VP2X2-FBAG



2X2-RABBITSQ



OCTA-SBR05



OCTA-SBR07

TRANSPORT



VL2x2-CASE

REMOTE CONTROL



VL-RC